



磁编码器配套磁铁

产品型号: EK10025CT

侧面图:

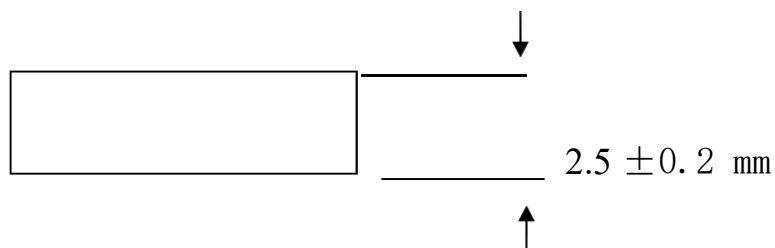

正面图:

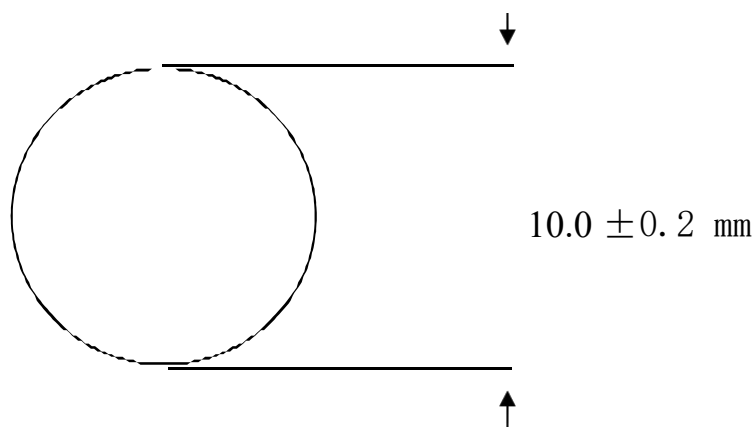

NOTES :

1、 MATERIAL -- NEODYMIUM IRON--BORON NEO 35H

MACNETIC PROPERTIES :

BR = 11,800 -- 12,200 GAUSS

Hc = 10,800 -- 11,500 OERSTEDS

Hci = $\geq$ 17,000 OERSTEDS

BHmax = 33 -- 36 MGOe

2、 IMA STANDARDS APPLY

UNLESS OTHERWISE SPECIFIED.

3、FULLY MAGNETIZED THRU DIA.

4、PLATE : Ni--Cu --Ni

.0002--.001 INCH THICK

ALL DIMENSIONS ARE AFTER PLATING.

ACCEPTANCE CLASS A-- 5 -- V

MATERIAL WEIGHT .0012 LBS


5、SALT SPRAY TESTING REQUIRED

12 HOURS MINIMUM

CUSTOMER :
TOLERANCE UNLESS INDICATED DIMENSIONS ARE IN MILLIMETERS BRACKETS DENOTE INCHES THOUSANDTHS +/- .127 (.005) HUNDREDTHS +/- .51 (.02) ANGLES +/- 0.5 SPC CLASS
TITE : MAGNET



磁铁照片

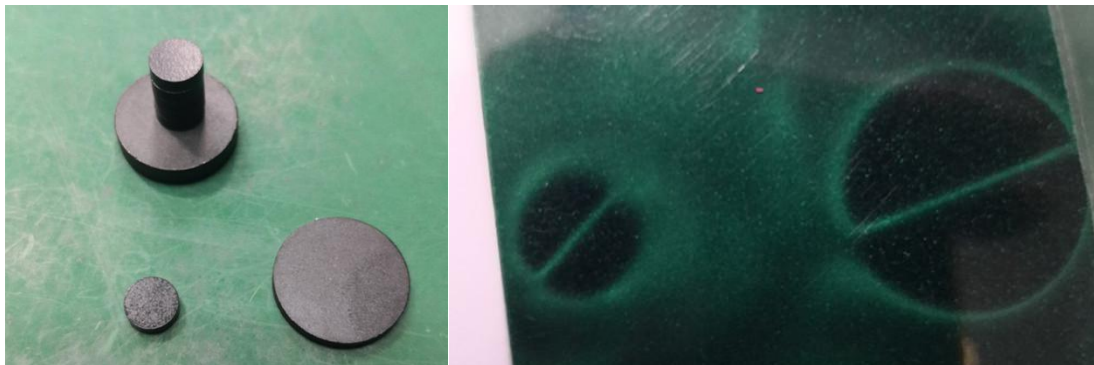

上海易科通讯设备有限公司

上海公司

地址：上海浦东外高桥保税区奥纳路79号交能国际大厦610室

电话： 086-21- 51699288

传真： 086-21- 51156175

网 站： <http://www.ekeic.com>